


S
C
A
B
C
D
E
F
G
H
I
J
K
L
M

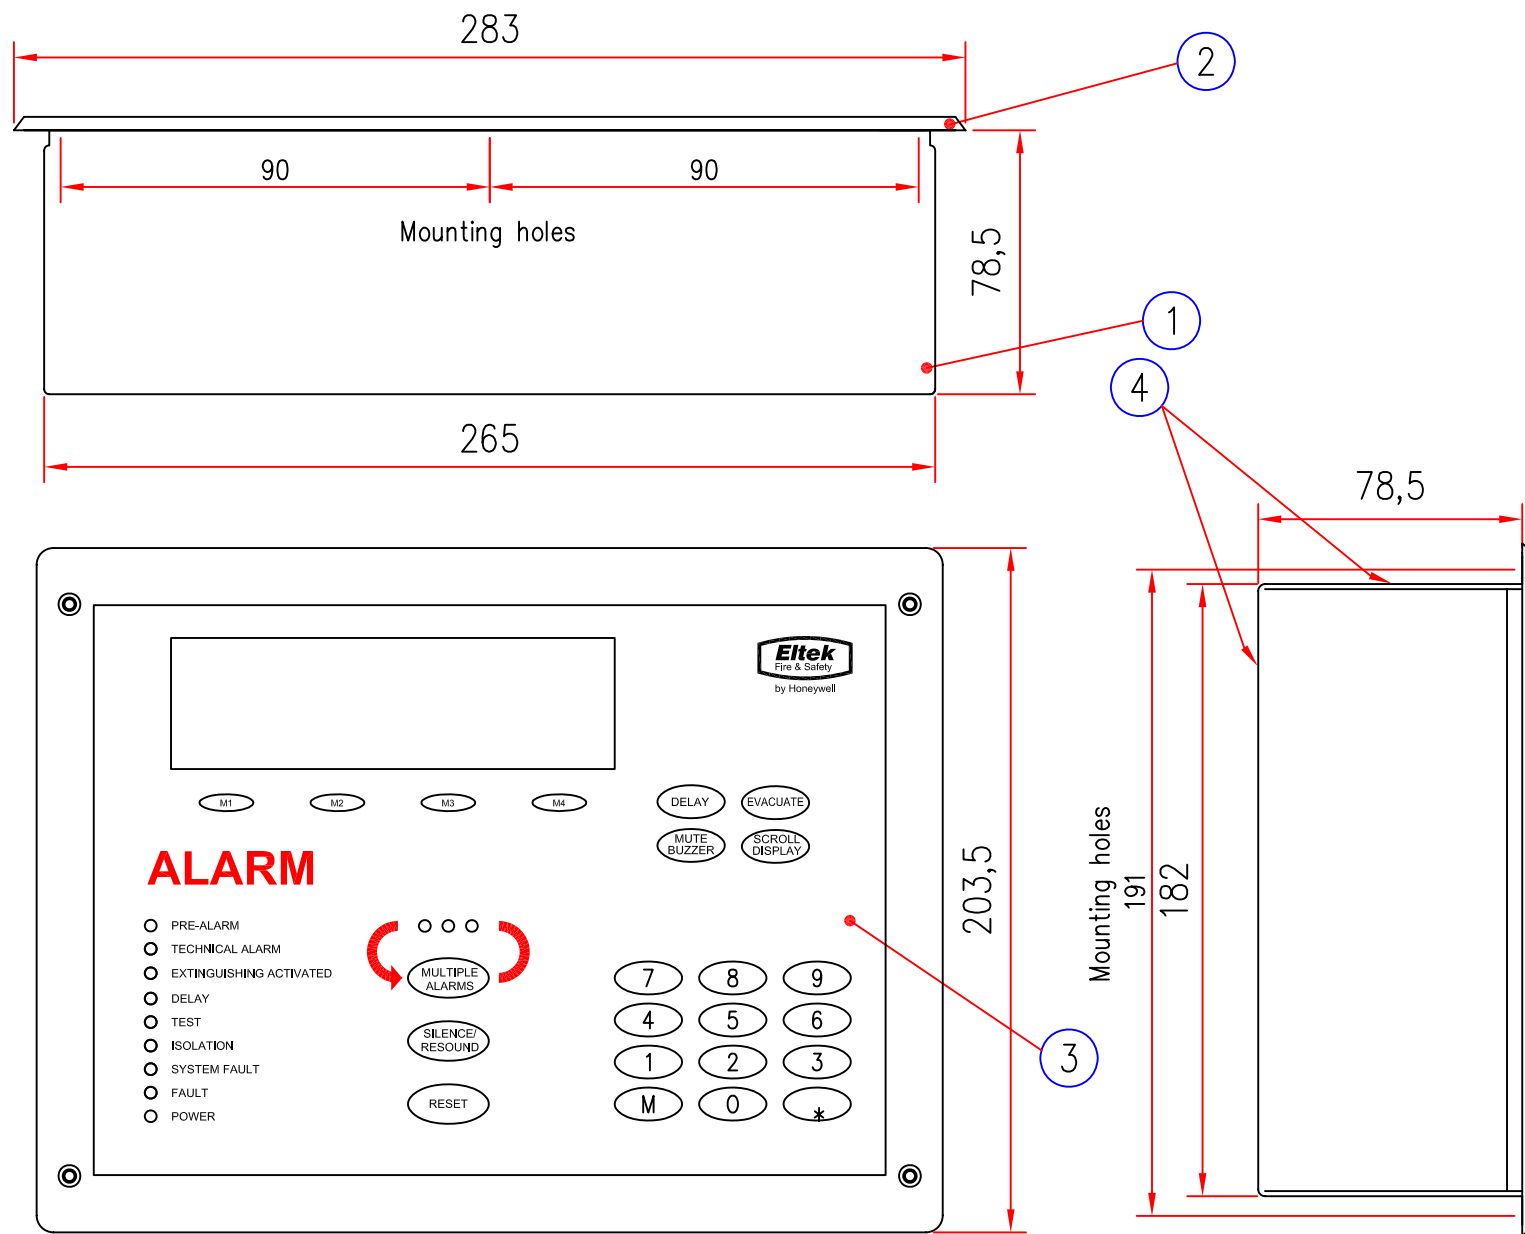

ITEM	DESCRIPTION	MATERIAL	QTY.
1	BOTTOM	Aluzink	1
2	FRAME	Aluzink	1
3	FACIA	sTRUCTURAL POLYESTER	1
4	CABLE ENTRY		1
			6

Art. no.	251242 (251342 - Catef)
Dimensions	265x182
Weight	3,7kg
Material	Al.
IP rating	42
Colour	Grey
Input supply voltage	21-30V DC
Output A/V	
Consumption Stb.	60mA
Alarm current	120mA
Temp. range storage/operation	-20°C +70°C 0°C + 50°C
Environmental rating	

NOTE:
For connection to PL5, COM1, COM2 and TB2, see User Manual Fireguard Delta.

Sym.	Ant./Qty.	Forandring/Alteration	Date/Sign.

Dato/Date	Konstr./Design	Kontroll/Controlled	Målestokk/Scale
2008-08-27	TEM		—
Arkiv/Archive	Tegnet/Draw	Godkjent/Approved	
P-ARKIV	TEM		

General Product Drawing Delta OP Marine Flush mounted		Erst. for/Replace for T43880-N3
Henvising/Reference IFS	Ordre nr./Order no.	Konsulent/Consultant

