


**1-WAY L-SHAPE ELECTRICAL EARTH BAR FITTED WITH EARTH BOSS TYPE G**

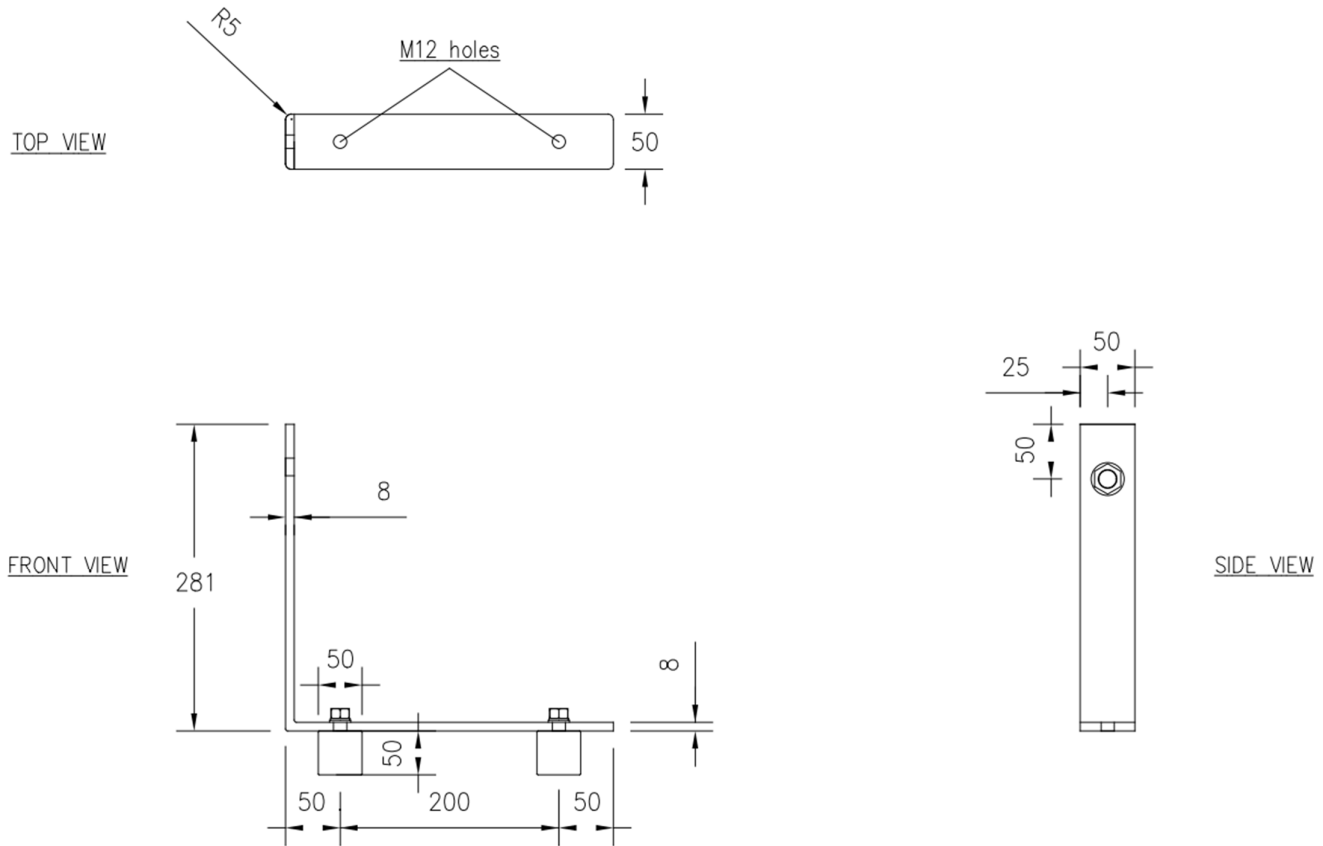

**PART NUMBER: 01WEB-050008 + BOSS-050050012**

**CHARACTERISTICS**

The electrical tin-plated copper earth bar, constructed using high-density, high-conductivity (HDHC) copper, is a vital component in electrical grounding systems. Designed to ensure the safety and integrity of electrical installations, this earth bar is equipped with SS316 A4 fasteners for easy installation and secure attachment.

8 Micron Electro Tin Plated

Supplied with M8, M10, M12, 5/16", 3/8", 1/2" bolts and red insulators or SS316L bosses

Insulated up to 600v AC / 750v DC - for use up to 600 amps

Earth bars up to 20 way stocked & manufactured as standard

Standard earth bars 300mm<sup>2</sup>

Manufactured from 50/ 6 or 2"/ 1/4" HDHC Copper as standard

PRODUCT PROPERTIES

---

Complies With: IEC 62561-1:2017 Class H

Material: Copper

Finish: Tinned

Number of Connections: 1

Distance between Termination Bolt: 231 mm from plain

Termination Bolt: M16 x 40 mm

Insulator Bolt: M12 x 40 mm

Overall Height: 331 mm

Length: 300 mm

Width of Earth Bar: 50 mm

Width of Insulator with SS316L Base: N.A.

Thickness: 8 mm